



Battery Range Summary

Delivering more power in less space, DataSafe[®] HX front terminal 16V Uninterruptible Power Supply (UPS) batteries eliminate the difficult maintenance and burdensome space requirements of top terminated 12V UPS batteries.

Manufactured with Valve Regulated Lead Acid (VRLA) technology, DataSafe HX front terminal batteries are conducive to incorporating monitoring systems and scale easily to larger capacity UPS systems with one-quarter fewer parallel battery strings.

Built on well established electrochemistry and available in 550 WPC, 800 WPC and 925 WPC sizes, these batteries are more space efficient, more cost effective and easier to maintain than 12V batteries.

Features and Benefits

- Smaller footprint per kilowatt than top terminated 12V batteries – more than 20% space savings for a full 15 minute run time for 750kVA UPS systems
- Eliminates wasted headspace found in typical 12V top terminated designs
- Complete front access simplifies installation
- Easy terminal access simplifies maintenance – no costly slide out trays required
- Improves reliability
- 800 and 925 WPC design reduces number of parallel strings required
- Up to 50% fewer connections means less maintenance
- Scales easily to large capacity UPS systems
- Fits within many existing cabinet designs including DataSafe HX Front Terminal 16V Series Battery Racks (see back)

Construction

Insulating covers

Voltmeter probe access enhances safety and simplifies maintenance routines.

Integrated handle support

Doubles as an automatic spacer between units to enhance airflow and thermal management.

Self-sealing, flame-arresting vents and low pressure non-return valve

Prevent ingress of atmospheric oxygen.

Nord-Lock® washer

Provides secure front terminal M8 connection over the life of the battery.

Solid tin-plated copper busbars




Reduce connection resistance to enhance power delivery from the battery system

Dual-tab washer

Enables quick connection to battery monitoring systems

Polypropylene strap handle

Simplifies installation, removal and replacement.

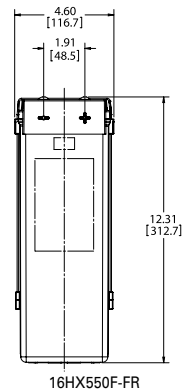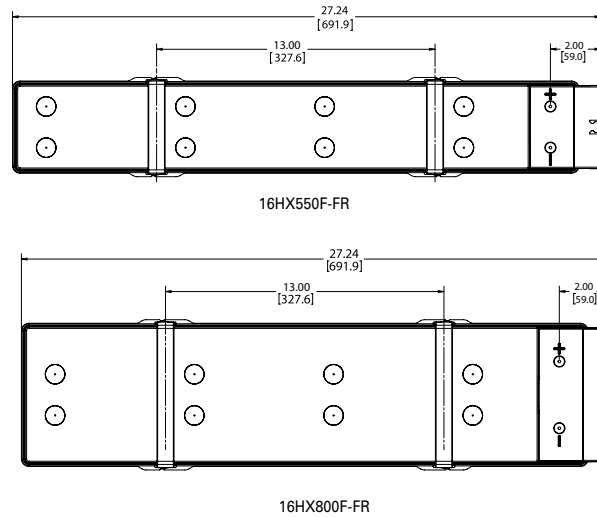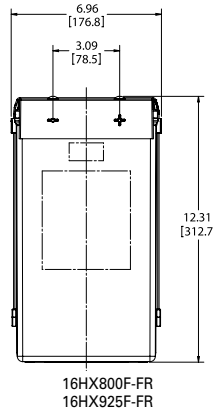

Note: All measurements shown in inches [millimeters]

Battery Specifications

Type	Watts/Cell			Nominal Dimensions								Unpacked	
	Number of cells	Nominal voltage (V)	15 min rate to 1.67 @ 77°F (25°C)	Length		Width		Overall* Height		lbs	kg		
				in	mm	in	mm	in	mm				
16HX550F-FR	8	16	550	27.2	692	4.6	117	12.3	313	151	68.5		
16HX800F-FR	8	16	800	27.2	692	7.0	177	12.3	313	232	105.2		
16HX925F-FR	8	16	925	27.2	692	7.0	177	12.3	313	248	112.5		

16HX550F-FR Constant Power Discharge (Watts per cell at 77°F (25°C))

End Volts	Standby Time (Minutes)																						
	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	25	30	45	60	90	120	240
1.60	927	873	825	780	738	700	666	635	607	581	556	534	513	491	472	453	382	332	242	191	136	106	58
1.63	911	860	813	769	730	694	661	631	604	579	556	534	513	491	472	453	382	332	242	191	136	106	58
1.65	898	849	802	760	723	688	656	627	601	576	554	532	512	491	472	453	382	332	242	191	136	106	58
1.67	884	836	790	750	713	680	650	622	596	572	550	529	508	488	469	452	382	332	242	191	136	106	58
1.70	859	811	769	731	697	665	637	611	587	564	543	521	500	481	463	446	380	332	242	191	136	106	58
1.75	802	762	725	691	660	632	606	582	561	539	518	498	479	462	445	430	370	324	239	190	136	106	58

16HX800F-FR Constant Power Discharge (Watts per cell at 77°F (25°C))

End Volts	Standby Time (Minutes)																						
	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	25	30	45	60	90	120	240
1.60	1197	1197	1197	1143	1085	1032	984	939	899	862	827	796	767	740	715	691	590	516	378	301	216	170	94
1.63	1197	1197	1177	1117	1063	1013	967	925	887	851	818	787	759	733	709	686	590	516	378	301	216	170	94
1.65	1197	1197	1154	1097	1046	998	954	914	877	842	810	780	753	727	703	681	588	516	378	301	216	170	94
1.67	197	1191	1130	1075	1026	981	939	900	865	831	800	772	745	720	697	675	584	515	378	301	216	170	94
1.70	1197	1146	1089	1039	993	951	912	876	843	812	783	756	730	707	684	663	576	508	378	301	216	170	94
1.75	1114	1060	1012	967	927	889	855	824	794	767	742	718	696	675	655	636	556	493	370	297	216	170	94

DataSafe® 16V HX Front Terminal Battery Racks

DataSafe® HX Front Terminal 16V Series Battery Racks* (See Figure 1) are available in UBC Zone 0 as well as at or Below Grade Rated UBC Zone 4. Visit www.enersys.com for more information.

16HX-FT Battery	Zone 0 Rack	Zone 4 Rack
16HX500F-FR	US-UAPx-RK	US-UJPx-RK
16HX800F-FR	US-UAQx-RK	US-UJQx-RK
16HX925F-FR	US-UAQx-RK	US-UJQx-RK

* Battery Rack Accessories, inter-unit and inter-tier connectors etc., are not included in Rack or Battery prices as their size varies based on the specific site application or rates. Once properly sized and quoted by EnerSys, Battery Rack Accessories are available and sold as separate line items.

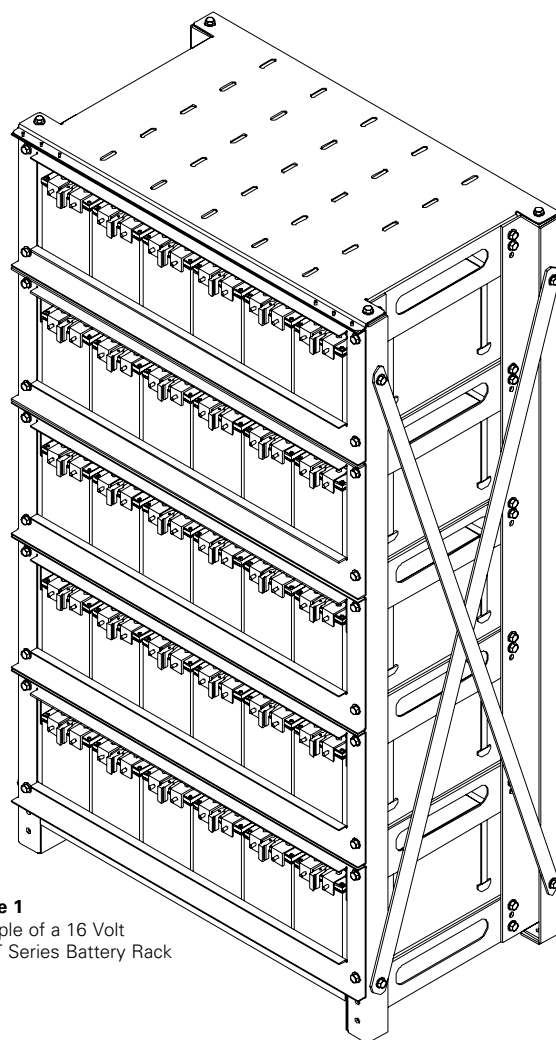


Figure 1
Example of a 16 Volt
HX-FT Series Battery Rack

DataSafe® 16V HX Front Terminal Battery Cabinet Systems

Cabinet System Model Number**	Model	# of Units	Voltage	Width		Depth		Height		Single-String System Weight	15 MIN kW @ 1.67 at 77°F (25°C)			
				in	mm	in	mm	in	mm		1 String	2 String	3 String	4 String
SS65550480BL600A	16HX550F-FR	30	480	42.5	1080	31.5	800	72.0	1829	5250	132.0	264.0	396.0	528.0
ST64550384BL600A	16HX550F-FR	24	384	32.0	813	31.5	800	72.0	1829	4400	105.6	211.2	316.8	422.4
ST65550480BL600A	16HX550F-FR	30	480	32.0	813	31.5	800	84.0	2134	5250	132.0	264.0	396.0	528.0
SS65800480BL600A	16HX800F-FR	30	480	60.8	1543	31.5	800	72.0	1829	8500*	192.0	384.0	576.0	768.0
ST64800384BL600A	16HX800F-FR	24	384	50.0	1270	31.5	800	72.0	1829	7000*	153.6	307.2	480.8	614.4
ST65800480BL600A	16HX800F-FR	30	480	50.0	1270	31.5	800	84.0	2134	8500*	192.0	384.0	576.0	768.0
SS65925480BL600A	16HX925F-FR	30	480	60.8	1543	31.5	800	72.0	1829	8960*	222.0	444.0	666.0	888.0
ST64925384BL600A	16HX925F-FR	24	384	50.0	1270	31.5	800	72.0	1829	7448*	177.6	355.2	532.8	710.4
ST65925480BL600A	16HX925F-FR	30	480	50.0	1270	31.5	800	84.0	2134	8960*	222.0	444.0	666.0	888.0

*16HX800F-FR and 16HX925F-FR string consists of two cabinets, each cabinet weight is half the single-string system weight.

**Each cabinet system is single-string. For multi-string systems, order multiple cabinet systems.



EnerSys World Headquarters
2366 Bernville Road
Reading, PA 19605, USA
Tel: +1-610-208-1991 /
+1-800-538-3627

EnerSys EMEA
EH Europe GmbH
Baarerstrasse 18
6300 Zug, Switzerland

EnerSys Asia
152 Beach Road
Gateway East Building #11-03
Singapore 189721
Tel: +65 6508 1780